

Integrated LED Poster

An Ultra-thin All Weather Smart Advertising





DM-DP8020 (Indoor)



DM-DP6540 (Outdoor)

- Aluminum framework, light weight and thin body 55mm
- All weather using, high brightness, nice performance
 - Blind holes on side enable it free style installation
 - Any VI decoration frame is attachable
 - WIFI spot share, wireless connect by cell-phone
- Smart APP on phone enables easy content edit&upload

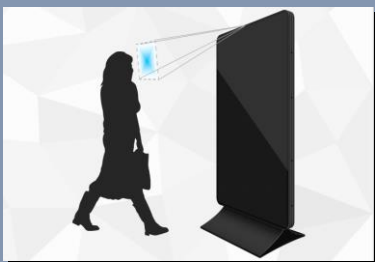

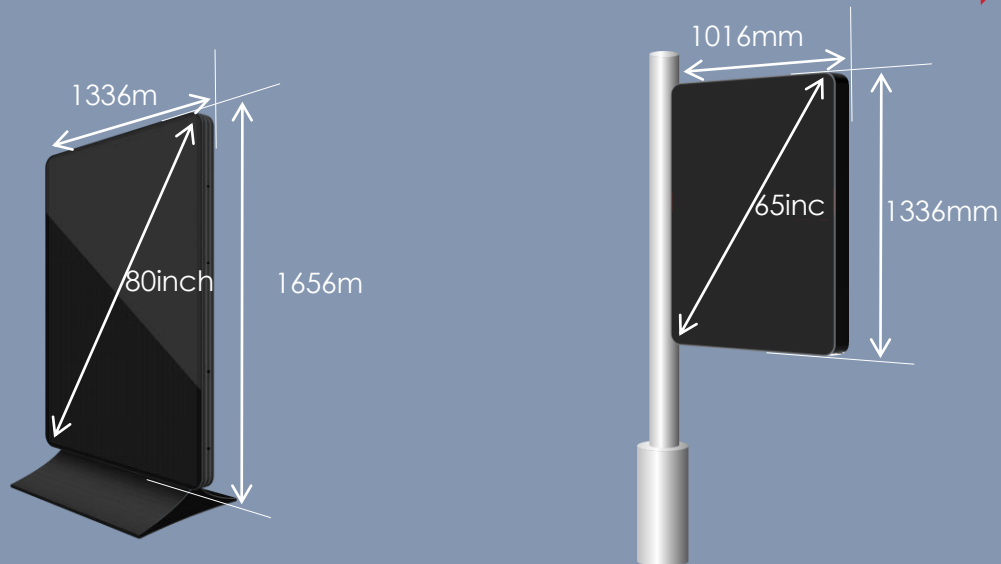

	Model	DM-DP8020(Indoor)	DM-DP6540(Outdoor)
Physical Parameter	Pixel pitch	2mm	4mm
	LED Model	SMD1921	SMD1921
	Module Size	320 x 160mm (W x H)	320 x 160mm (W x H)
	Module Resolution	80 x 40 pixels (W x H)	80 x 40 pixels (W x H)
	Display Size	1280 x 1600mm(W x H)	960 x 1280mm(W x H)
	Full Size	1336 x 1656mm(W x H)	1016 x 1336mm(W x H)
	Display Resolution	640 x 800pixels(W x H)	160 x 160pixels(W x H)
	Net Weight(kg)	40kg	32kg(1 side), 64kg(2 sides)
	Frame Material	Aluminum Profile	Aluminum Profile
Photoelectric Parameter	Brightness(nit)	1000nits	5000nits
	Refresh(Hz)	≥3840Hz	≥1920Hz
	Grayscale(bit)	16bit	16bit
	Drive Type	1/40 Scan	1/10 Scan
	Viewing Angle	H>160°, V>160°	H>160°, V>160°
Electrical Parameter	Power Input	AC100V~AC240V	AC100V~AC240V
	Max Power(W/set)	880W	640W
	Aver. Power(W/set)	337W	300W
Install& Maintenance	Maintenance	Front/Rear	Front/Rear
	Protection Grade	IP30	IP65
	Installation Way	Side Against / Mount / Hoist	Side Against / Mount / Hoist
Operation& Control	Control System	DM	DM
	Control Type	Asynchronous	Asynchronous
	Communication	4G/WIFI/WIFI Hot Spot	4G/WIFI/WIFI Hot Spot
	Software	Smart Display APP	Smart Display APP
	Operation Terminal	PC/Cellphone	PC/Cellphone